


MULHERN BELTING WELDWALL™

Available in *PVC* *RAV* *URETHANE*



- Avoid cold bond delamination with Mulhern Belting's exclusive homogeneous hot welded corrugated sidewall design
- White RAV and Urethane are FDA / USDA accepted

- PVC and RAV are fabric reinforced
- Solid clear Urethane is available
- Proven, reliable, long lasting

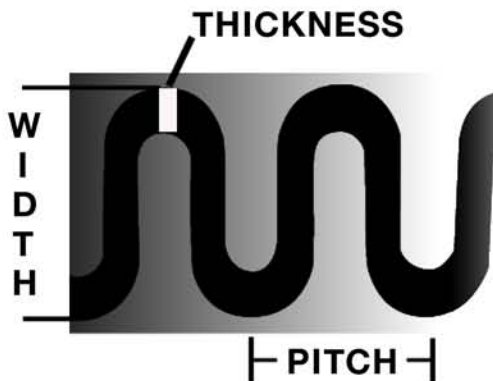

PVC and RAV Thickness.....	.187 (3/16")
Urethane Thickness.....	.125 (1/8")
Corrugation Pitch.....	2"
Corrugation Width.....	2"
Height.....	1"- 3"
Reinforcement	50 lb. Spun Polyester (PVC & RAV)
Minimum Pulley Diameter.....	6"- 9" (Depending on Weldwall™ Height)