



**MULHERN  
BELTING, INC.**

# Belt News

## IN THIS ISSUE

- > BELT PRO SMART PHONE APP
- > DID YOU KNOW?
- > NEW PRODUCT RED ALERT!
- > EMPLOYEE SPOTLIGHT

## Did you know?

Mulhern Belting ships over 70% of our orders within 24 hours of the order being placed. Every day. We have one of the best deliveries in the industry.



## MULHERN BELTING'S LOCATIONS

148 Bauer Drive  
**OAKLAND, NEW JERSEY 07436**

310 Osborne Drive  
**FAIRFIELD, OHIO 45014**

910 Highway 212  
Lumber Center Road  
**MICHIGAN CITY, INDIANA 46360**

6125 Xavier Drive SW  
**ATLANTA, GEORGIA 30336**


- > In-House Fabrication
- > On-Time Delivery
- > Multiple Stocking
- > Service
- > Locations
- > Quality

## BELT PRO SMART PHONE APPLICATION

The best service in the industry just got better. Belt Pro™ is the must-have phone app for all distributors and OEMs who sell conveyor belting. It puts the power of Mulhern Belting's full catalogue at your fingertips.



Have you ever wished you could submit quote requests with a few taps on your smart phone? Now you can with Mulhern Belting's Belt Pro™. The iOS version of Belt Pro™ also performs common calculations such as Belt Length from center to center, Angle of Repose and unit conversions.

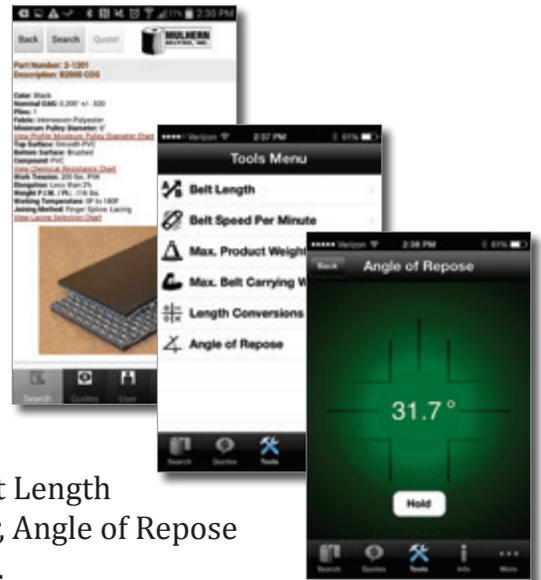

Specify the best Mulhern belt for every application from the palm of your hand whenever you need it!



Scan the appropriate QR code to download Mulhern Belting's Belt Pro™ app today!





# MULHERN BELTING

## BELT NEWS **VOLUME 15**

### **NEW PRODUCT RED ALERT!** **4-1501 2-PLY RED SUPERGRIP LONGITUDINAL GROOVE**

Problems with boxes back-sliding on inclines? Try Mulhern Belting's new 2-Ply Red Supergrip Longitudinal Groove. This is the stickiest belt we've ever seen! When testing this spec at a worldwide beverage manufacturer it outlasted and outperformed the previous light-weight rubber product two to one—and is still going strong! Call us for a quote today.

Color: **Red**  
Nominal OAG: **0.125" +/- .013**  
Plies: **2**  
Fabric: **Monofilament/Polyester**  
Minimum Pulley Diameter: **1.5"**



Top Surface: **Longitudinal Groove**  
Bottom Surface: **Bare**  
Compound: **Natural Rubber**  
Work Tension: **105 lbs. PIW**  
Elongation: **Less than 2%**  
Weight P.I.W. / Ft.: **.057 lbs.**  
Working Temperature: **-40F to 250F**  
Joining Method: **Lap Splice; Lacing**

### **EMPLOYEE SPOTLIGHT** **STEVE STONER**

Steve has been in the belting industry since 1966 and with Mulhern Belting as a Branch Manager since May of 1991. He has worked in all areas of the belting industry from production to sales. Steve and his high school sweetheart, Sara, have been married for forty-five years and have three children, Samantha, Seth and Sean,

and have been blessed with eight grandchildren. In his spare time Steve enjoys working in the yard during the summer, splitting wood, doing projects around the house and working in his wood shop during the winter. Whenever he escapes for a vacation he enjoys sculpting elaborate sand castles on the beach.

“During my years at Mulhern Belting I have seen the company grow from a third generation to a fourth generation company that always maintains high standards of excellence and makes a quality product that keeps them at the top of the belting field. I have always enjoyed working with our employees to teach them the trade or our customers to get them the best product for their applications. I have seen many changes in the material used to manufacture belts over the years. They have gone from cotton to balata to PVC, RMV, urethanes and now monofilament fabrics. I look forward to seeing how new products from around the world will change the belting industry in the future and make Mulhern Belting an even better conveyor belt supplier.”

Steve at home in his workshop

